

# USG-212

camera system

ISTAR USG-series payloads were designed by our company for UAVs, small manned aircraft, helicopters, autogyros, and aerostats. It's a perfect for long-range surveillance, search and rescue, and security applications.

Full-HD EO/IR with 30x optical zoom

Scene lock

Target tracking

Digital video stabilization

Anti-fog feature

On-board recording and storage




# Application cases

The synergy between the hardware and the software allows to execute various tasks depending upon mission.

## Search and rescue

Our equipment is able to make search and analysis in hard-to-reach areas of the Earth, to create reports while searching, and to operate in accordance with included protocols.


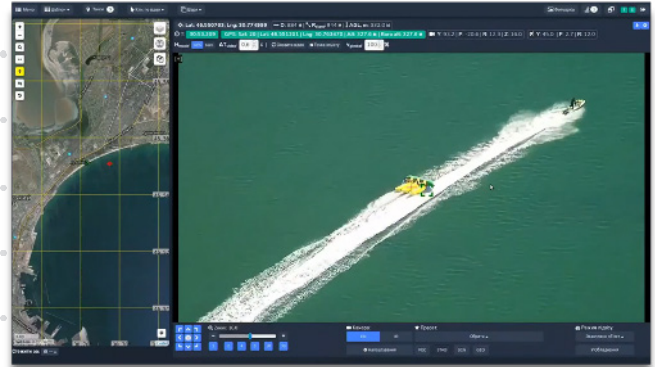


## Anti-poaching

The flexibility of our technical solution gives us an opportunity to adapt the functionality of our software to collect information in different fields. Whether it's counting polar bears in the Arctic or locating ivory poachers.

## Wildfire prevention

Monitor open space areas and measure the temperature changes in the selected preset area in automatic mode, locate the fire, determine the scale, position, and transmit all information to the Response Service.

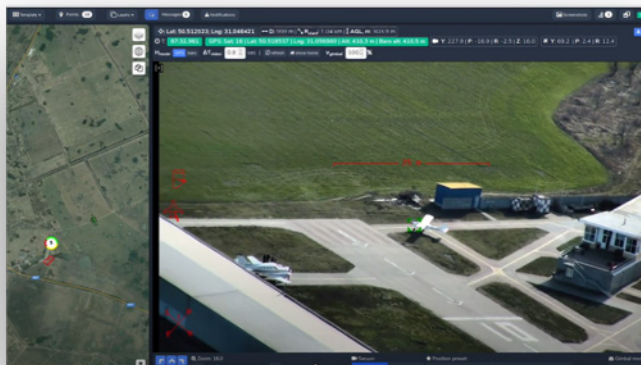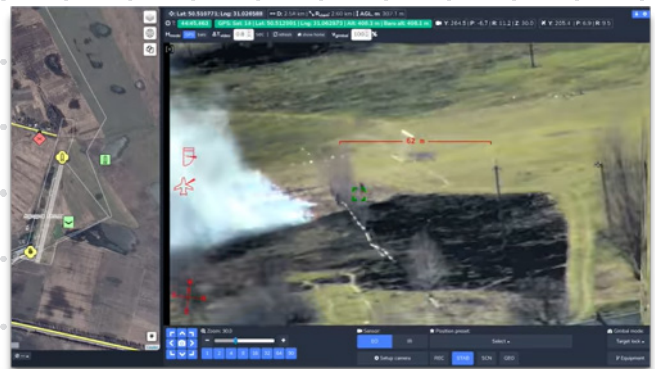

## Surveillance and observation

The flexibility of our technical solution gives us an opportunity to adapt the functionality of our software to collect information in different fields. Whether it's counting polar bears in the Arctic or locating ivory poachers.

# Application

## cases

We offer a wide range of EO/IR gyro-stabilized gimbals for fixed-wing and multi-rotor platforms. Possible application cases are innumerable and can be limited only with the platform restrictions our solution will be installed on. However, our camera systems comply with the highest quality standards and our team has huge expertise with camera systems integration on the various platforms.



**Military**




**Wildlife monitoring**



**Border control**



**Pipeline inspection**

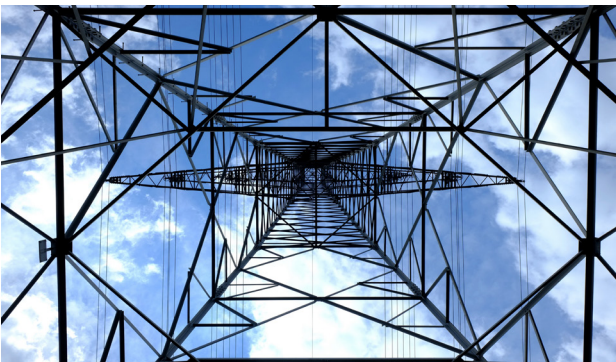

**Powerlines inspection**



**Police assistance**

# System

## features and technologies

During the years of constant improvement our team received comprehensive feedback from the end-users. Based on our experience and expertise we've made a conclusion that first and foremost human factor should be eliminated to decrease critical issues and failures. We want you to have one of the most reliable drones on the market.



### Objects on the map

Capture points of interest with just one click on the video. Click and the system saves the object and immediately add it on the map, with a photo attached.



### Live map

Observe the current location of the drone and the area where your gimbal is pointed. Moving map helps a lot to know the current mission information and plan the next steps.




### Augmented reality

See names of the streets, objects, and other useful information right above the video in real-time, so you won't miss anything.



### Reporting tools

Quickly generate standard PDF reports, save all objects on the live map, include general information of the flight.

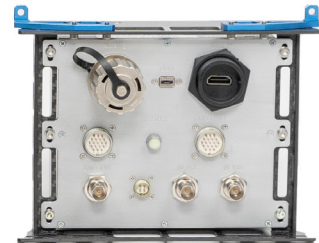

### Digital video stabilization

Stabilizes the image for clear and smooth video both online and raw onboard recordings.



### Target tracking

Simply click on the object and the camera system will immediately start tracking it: whether it's a human, vehicle, or any other object. Nothing can escape your eye.



### 30x optical and 4x digital zoom

Observe your point of interest in the smallest details no matter what the distance is.



### Capable of operating in harsh weather conditions

From -10C to +40C, despite the rain, fog, wind, or mist.



### Picture-in-picture

Check both EO and IR video streams simultaneously.



### Onboard video recording

The whole mission may be recorded from both sensors for better analytics or post-mission check.

# Aerowatcher

## software

Reporting module allows you to quickly generate a standardized report of your aerial surveillance. It will contain general information about your flights, such as time and date, duration, total distance traveled, number of detected objects, and flight route.

Right after that, you will find every object that was detected during the current session. Object description includes general information, coordinates, photo, and location on the map. The report can be exported as a PDF file and can be easily forwarded to a client and passed by to a decision-maker.

**UKRSPEC SYSTEMS**

Report created by "Terminal" software by "UkrSpecSystems" Ltd.  
30/32 Zhilyanska str. Kyiv, Ukraine, 01033  
tel.: +38 044 333-30-79, +38 073 423-45-12  
info@ukrspecsystems.com, www.ukrspecsystems.com

restricted

### REPORT ON AIR RECONNAISSANCE #2019-05-15


Air reconnaissance team: UkrSpecSystems

UAV type	PD-1 + photcamera (offline)
Date and time of mission (takeoff - landing)	2016-09-09 05:52:13 - 2016-09-09 10:01:21
Duration	3:32:24
Area	Desna, Kiev region
Takeoff & landing place	Kozelets
Flight distance	351.56 km
Height over ground, up to	1.61 km
Materials analyzed	122 photos (3.28 GB)
Results	1). Block-post1 (Military Base - Military Infrastructure - Infrastructure - Land installations) 2). Точка 2 2222 (Multiple Rocket Launcher - Weapons/Weapons System - Land equipment)
Report creation time	2019-12-21 13:48:47

2). Точка 2 2222

Description:

Coordinates	12.126354, 12.234876
target location	
Elevation	212 m (AMSL)
12.126354, 12.234876	
target detailed description	




## Mission replay mode

Sometimes you miss important things when you are in a rush or there is simply not enough time to carefully study the video during the flight. This is why we introduce the post-processing mode.

Upload video or photos from the drone, together with the log file to the software and you will enter replay mode that will simulate the flight.

You can see the same video already synchronized with the flight route, and know exactly where it was recorded. Use a set of tools, like video enhancement, zoom, annotations to take a maximum of your visual materials and collect as much information as possible.

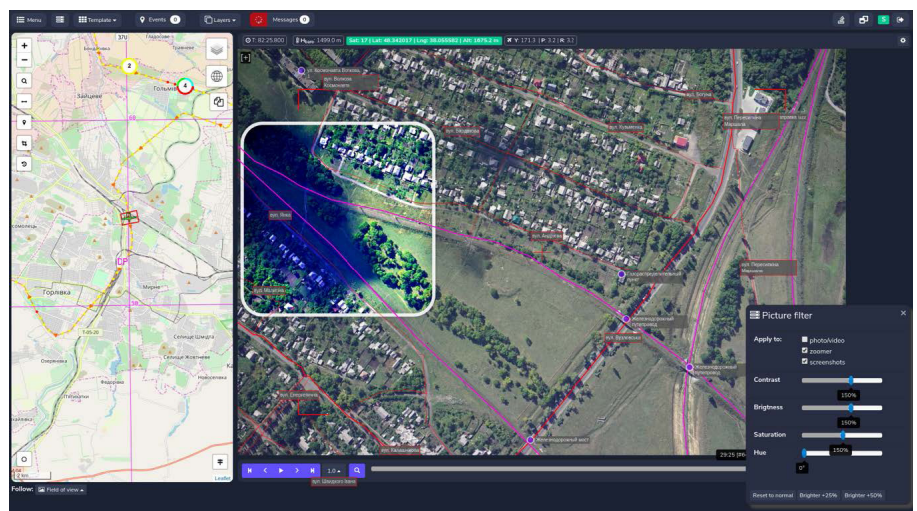

# Technical details

## Gimbal specs:

Width .....	152 mm
Height .....	214 mm
Weight .....	2.3 kg
Optical zoom .....	30x
Digital zoom .....	4x
Yaw .....	360°
Pitch .....	-30-110°
EO resolution .....	1920 x 1080
EO framerate .....	60 fps
LWIR resolution .....	640 x 512
IR framerate .....	50 fps
Electric consumption .....	10...36V, 4A
EO FOV .....	63.7° (wide) to 2.3° (tele)
IR FOV .....	15.2°
Working temperature .....	-10°C to +40°C
EO video out .....	HD-SDI (BNC 75 Ohm)
IR video out .....	AV/CVBS (BNC 75 Ohm)
Commands .....	Pelco-D, MAVLink (RS-19)

## DRI. Vehicle EO/IR

Detection .....	9000/4475m
Recognition .....	2200/1135 m
Identification .....	1100/478 m

## DRI. Human EO/IR

Detection .....	3500/1490 m
Recognition .....	1700/375 m
Identification .....	900/187 m


## VPB specs:

Width .....	120 mm
Height .....	82 mm
Length .....	149 mm
Weight .....	0.75 kg

## Anti-vibration mount specs:

Width .....	270 mm
Height .....	70 mm
Length .....	249 mm
Weight .....	0.65 kg

[www.uascomponents.com](http://www.uascomponents.com)

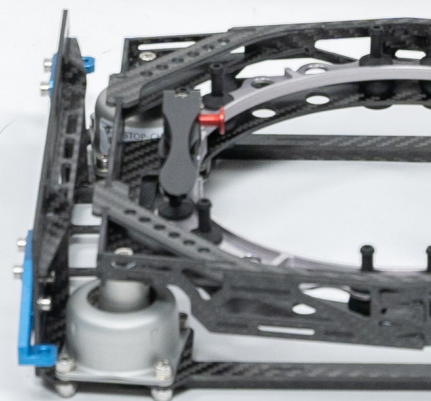

# System

includes

The USG camera systems come as plug-and-play turnkey solution. To begin with cablework and to end with controllers - simply connect it with your aircraft and execute the mission.

## What you get :

- USG-212 gimbal
- Video processing block
- Anti-vibration mount
- Rugged laptop/tablet pc with preinstalled software
  - Controllers
  - Connection kit
- Rugged transportation kit

Want to know more?



