

CPS-60

CREDIT CARD PAY STATION



FAST

- High-resolution 10.1" color touch screen supports: ticketless, rate display, prepay options, and help services
- Print patron receipt on demand
- Supports ticketless operations
- Embedded Voice Over IP intercom and Pinhole IP camera



FLEXIBLE

- Numerous credit card solutions including: Mag-Stripe, P2PE EMV with or without pin pad, and NFC
- Various access credentials include: LPR, HID Proximity, Mifare, Mag-Stripe Room Key, QR barcodes, BLE, and AVI
- Supports validation barcode stickers, coupons, vouchers, and drivers license
- Monthly recharge options
- Surge protection built-in



CREDIBLE

- Rugged, tamper-resistant stainless steel housing
- O/S less embedded technology
- FCC, CE, UL, CSA certified
- PCI 3.2 compliant
- ADA compliant



About the New TIBA X60 Series.

- Smarter and faster than ever with new product architecture.
- Increased security to protect your data.
- Connectivity using native TCP/IP and RS485.
- User engagement through extra-large, high contrast touch screen.
- Easy to install, service, and maintain.
- Backward compatibility. Seamlessly mix X30 and X60 devices.
- New technology. More features at a lower cost of ownership.

CPS-60 CREDIT CARD PAY STATION

FEATURES

Driver Instruction Display	10.1" high-resolution color touch screen display
Ticket Verifier	Barcode scanning or motorized barcode ticket reader
Barcode Scanner	Reads multiple barcode formats - 1D & 2D, QR, PDF417 and more. Supports various barcode credentials via mobile device or paper.
Receipt Printer	For receipts and lost tickets
Hotel Room Keys	Supported
Customer Display	Hi-resolution TFT color display
Intercom	Built-in VoIP
Surge Protection	Built-in
Credit Card Payments	Mag-Stripe, P2PE EMV with or without pin pad, NFC

OPERATIONS

Processor	High-speed embedded industrial processor
Operating System	O/S Less
Communication and Network	Native TCP/IP Ethernet, or RS-485 Communication
Built-In Clock	Lithium-ion battery
Off-Line Operation	Off-line functionality supported
Remote Monitoring	Real-time transaction and events monitoring via Facility Management System

HOUSING

Construction	Stainless steel
Measurements	14.0" (35.6 cm) W; 18.7" (47.6 cm) D; 49.9" (126.7 cm) H
Weight	Dependent on components selected
Color (Housing)	Standard: White RAL 9010
Faceplate	High-grade epoxy-based TIBA standard or custom design
Locks	Keyed device lock

ELECTRICAL



Voltage	100-240 VAC, 50-60 HZ
Current	6.5A approximate max. (with heater)
Power Consumption	640W (with heater)

ENVIRONMENTAL CONDITIONS

Operating Temperature	-4° to 122°F (-20° to 50°C) with heater
IP Rating	54

REGULATORY

Safety	UL 60950-1:2007 CAN/CSA-C22.2 No. 60950-1-07
EMC	CE, FCC Part 15, Subpart B, Class B

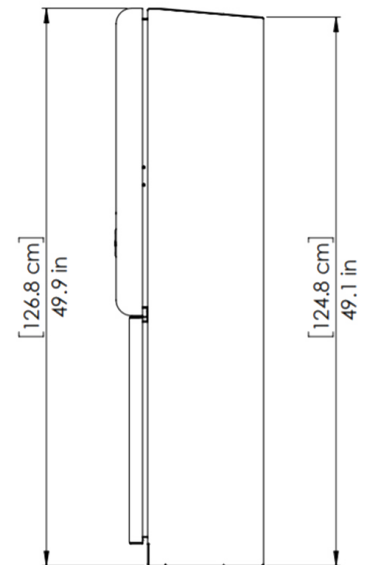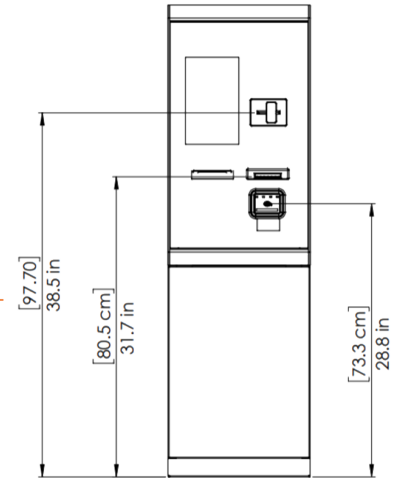

USA
2228 Citygate Drive
Columbus, Ohio 43219

ISRAEL
17 Hamefalsim Street
Petah-Tikva, Israel 4951251

T: +1 (614) 328-2040 F: +1 (614) 864-2153
866-901-8883 Toll Free

T: +972-3619-9777 F: +972-3-905-4306