

# LED-lamp T8 PC

Even more efficiency

- lighting efficiency - up to 163 Lm/W
- input voltage range 90-265V
- one-side power connection
- optical polycarbonate diffuser
- flicker free solution



**163 Lm/W**  
lighting  
efficiency

**0%**  
flicker  
factor


**83 Ra**  
CRI

**-20°C to +45°C**  
operating  
temperature

**220V**  
supply  
voltage

**3**  
years  
warranty

ITEM	Power, W	Luminous flux, Lm	IP protection	CCT, K	SIZE (AxBxC), mm
LT8-PC-300-N/C/W	4	650			286x302x26
LT8-PC-600-N/C/W	7	1136		4000	590x605x26
LT8-PC-900-N/C/W	10	1630	20	/6000/	895x908x26
LT8-PC-1200-N/C/W	13	2110		3000	1200x1213x26
LT8-PC-1500-N/C/W	19	3084			1500x1513x26

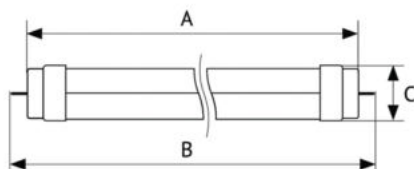

## Installation



Metal clip for T8 lamp



Terminal for T8 lamp