

Deco

Linear Led-lamp

- lighter construction
- body material - aluminum anodizing
- diffuser material for LED – PMMA efficiency 80%
- flicker free driver
- driver Philips Xitanium
- various paint colors
- suitable for any kind indoor spaces



140 Lm/W

lighting
efficiency

0,9

power
factor

83 Ra

CRI

-20°C to +45°C

operating
temperature


220V

supply
voltage


5

years
warranty

ITEM	Power, W	Luminous flux, Lm	IP protection	CCT, K	SIZE (AxBxC), mm
LD-600-N/C/W-S/G/B/W-S/W	20	2240			600x48x60
LD-1000-N/C/W-S/G/B/W-S/W	30	3360		4000	998x48x60
LD-1200-N/C/W-S/G/B/W-S/W	36	4032	IP44	/6000/	1192x48x60
LD-1500-N/C/W-S/G/B/W-S/W	46	5152		3000	1484x48x60
LD-2000-N/C/W-S/G/B/W-S/W	54	6048			2019x48x60



— C0 - C180 — C90 - C270

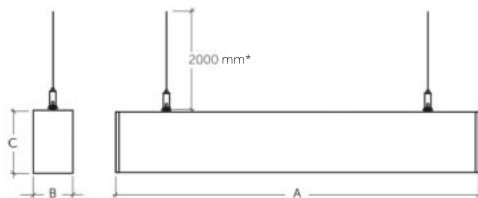

* Adjustable installation

Installation



Suspension mount



Wall ceiling mount