

# Deco Uni

Linear Led-lamp

- lighter construction
- 140 Lm/W – lighting efficiency
- linear optics 40/60/90/120 degrees
- luminaire length according to customer's request
- diffuser material for LED – PMMA efficiency 80%
- body material – aluminum anodizing
- suitable for any kind indoor spaces



**140 Lm/W**  
lighting  
efficiency

**0,5/0,9**  
power  
factor


**83 Ra**  
CRI

**-20°C to +40°C**  
operating  
temperature

**220V**  
supply  
voltage

**5**  
years  
warranty

ITEM	Power, W	Luminous flux, Lm	IP protection	CCT, K	SIZE (AxBxC), mm
LDU-1200-C/N-S-S/W	36	4320	IP44	6000/4000	1187x37x62
LDU-1500-C/N-S-S/W	46	5520		6000/4000	1480x37x62

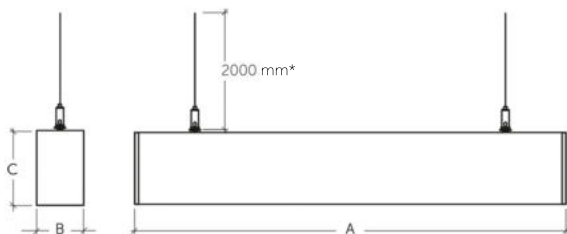

\* Adjustable installation

## Installation



Suspension mount



Wall ceiling mount