

# Industrial Led-lamp Ellipse 3

Effective and universal

- housing made of optical polycarbonate
- 120 lm/w – lighting efficiency
- two mounting options - suspension mount / wall ceiling mount adjustable installation
- tri-proof light technology IP65



**120 Lm/W**  
lighting  
efficiency

**0,9**  
power  
factor


**83 Ra**  
CRI

**-20°C to +45°C**  
operating  
temperature


**220V**  
supply  
voltage

**3**  
years  
warranty

ITEM	Power, W	Luminous flux, Lm	IP protection	CCT, K	SIZE (AxBxC), mm
LE3-300-N/C/W	8	960	65	4000 /6000/ 3000	344x76x46
LE3-600-N/C/W	15	1800			608x76x46
LE3-1200-N/C/W	36	4320			1203x76x46
LE3-1500-N/C/W	52	6240			1548x76x46



— C0 - C180 — C90 - C270

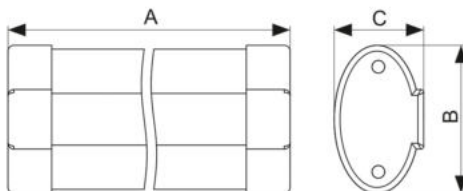

## Installation



Suspension mount



Wall ceiling mount