

Industrial Led-lamp Ellipse 2

Effective and universal

- diffuser made of optical polycarbonate
- 120 lm/w – lighting efficiency
- housing made of anodized aluminum
- for use in harsh environments
- protection IP 54



120 Lm/W
lighting
efficiency

0,9
power
factor


83 Ra
CRI

-20°C to +45°C
operating
temperature


220V
supply
voltage

5
years
warranty

ITEM	Power, W	Luminous flux, Lm	IP protection	CCT, K	SIZE (AxBxC), mm
LE2-600-N/C/W	27	3240		4000	640x104x50
LE2-1200-N/C/W	54	6480	54	/6000/	1222x104x50
LE2-1500-N/C/W	72	8640		3000	1510x104x50



— C180 — C270

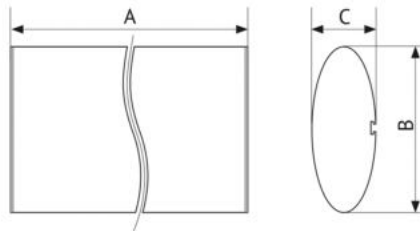

Installation



Suspension mount



Wall ceiling mount