


Kite

Street LED-lighting

- modular replacement technology, ease of installation
- aluminum construction with high mechanical strength
- special road optics
- mounting on the console
- type of lens: semi-wide special distribution curve
- in winter it is not covered icicles and frost
- used for lighting local roads, highways, streets

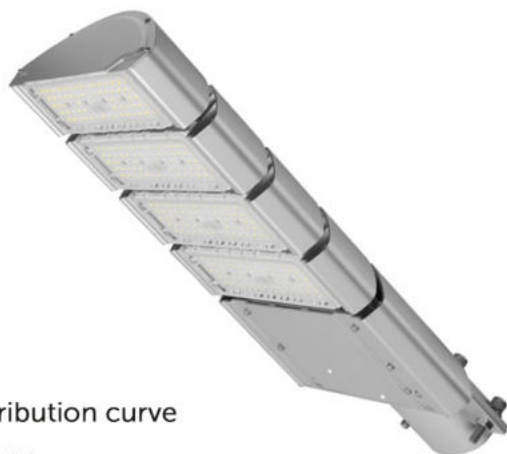

132 Lm/W
lighting efficiency

0,95
power factor


73 Ra
CRI

-40°C to +50°C
operating temperature

220V
voltage

5
years warranty

ITEM	Power, W	Luminous flux, Lm	IP protection	CCT, K	SIZE (AxBxC), mm
LK-60-N/C/W	60	7920			312x300x95
LK-100-N/C/W	100	14000			392x300x95
LK-120-N/C/W	120	16800	IP65	4000/6000/3000	392x300x95
LK-150-N/C/W	150	21000			472x300x95
LK-180-N/C/W	180	25200			472x300x95

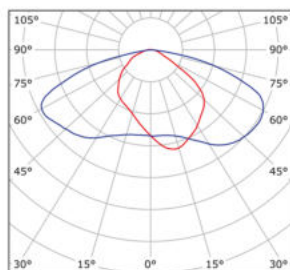

— C180 — C270

