

Spiritline

Wall washer for architectural lighting

- aluminum PCB with sealed compound
- wide range of optics
- RGB glow color:
White/Red/Green/Blue/Amber
- protective glass made of tempered material
- light scattering angles: 6/15/30/60
- IP 67 operates in the temperature range
-30C to +50C



120 Lm/W
lighting
efficiency


0,6
power
factor

-30°C to +50°C
operating
temperature

220V
supply
voltage

5
years
warranty

ITEM	Power, W	Luminous flux, Lm	IP protection	CCT, K	SIZE (AxBxC), mm
LW-300-N/C/W/ R/G/B/A-S/B-W	10,5	1260	IP67	4000/ 6000/ 3000/ RED/ GREEN /BLUE/ AMBER	325x55x72
LW-600-N/C/W/ R/G/B/A-S/B-W	21	2520		630x55x72	
LW-1200-N/C/W/ R/G/B/A-S/B-W	42	5040		1208x55x72	

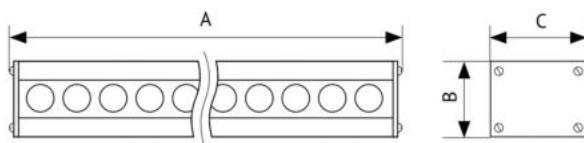

Installation



Universal wall mounting