

**Storage tank + Distribution manifold**

**Three elements heating system in one:**

**Tank** with a volume of 40-60-100 liters

(depending on the model)

**Manifold** for 2-3 pump groups

(depending on the model)

**Hydraulic separator** with deaerator

Ability to connect to **2 heat sources**,

for example: heat pump + boiler

Center-to-center distance on connection pipes to

heat sources - 125 mm.

This allows you to attach or

pump group for connecting a heat source, or

use 1 pair of these spigots to connect


another consumer.

1"ZR pipe for connecting the expansion tank

2 options for thermal insulation


- Standard - 28 mm ERR 40 g/l

- Reinforced – 10 mm rubber + 28 mm EPP 40 g/l


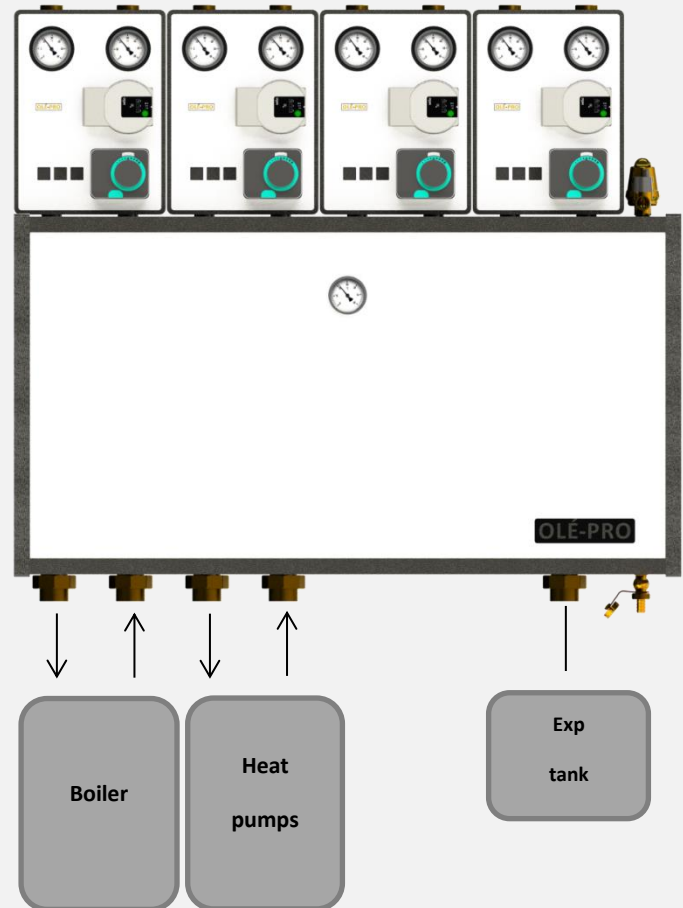


**Uni-Tank complete set:**

- Wall mounting kit
- Insulation rubber + EPP 26 mm 40g/l
- Thermometer

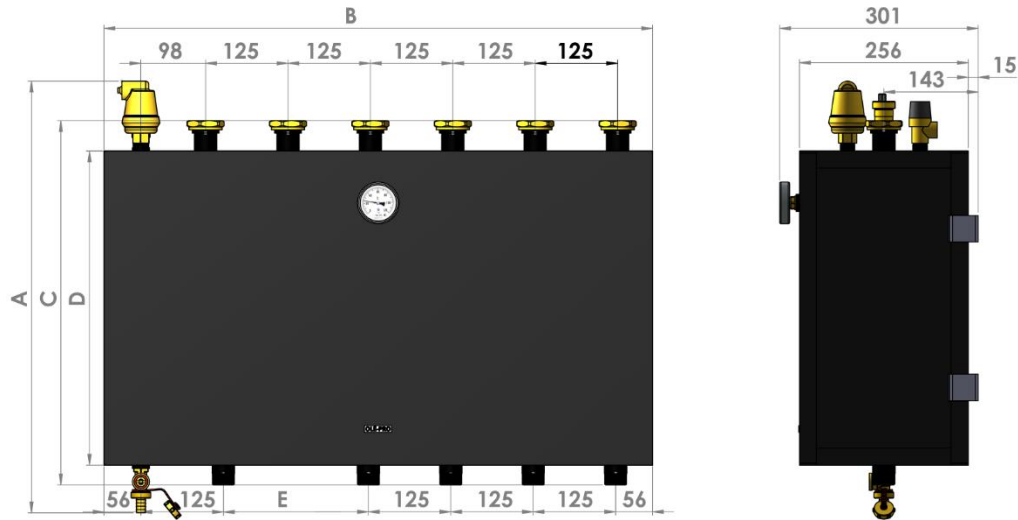

Art		Volume, L	A,mm	B,mm	C,mm	D,mm	E,mm
OTU- 40-3-D-i	3	40	518	832	416	340	220
OTU- 60-2-D-i	2	55	654	712	552	476	100
OTU- 60-3-D-i	3	60	654	832	552	476	220
OTU- 100-2-D-i	2	90	938	712	836	760	100
OTU- 100-3-D-i	3	100	938	832	836	760	220
OTU- 100-4-D-i	4	100	654	1102	552	496	470

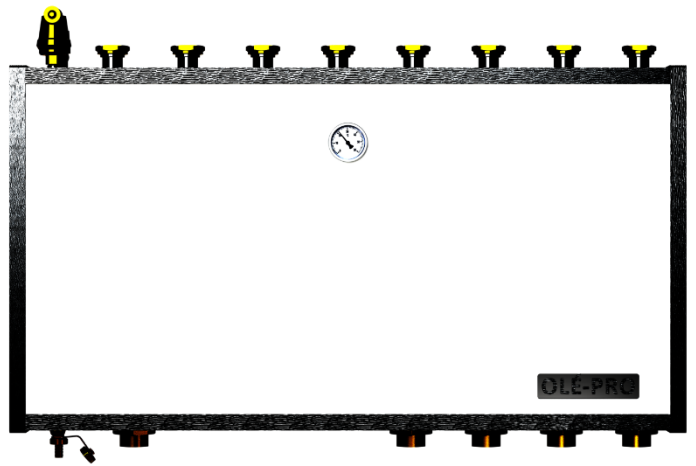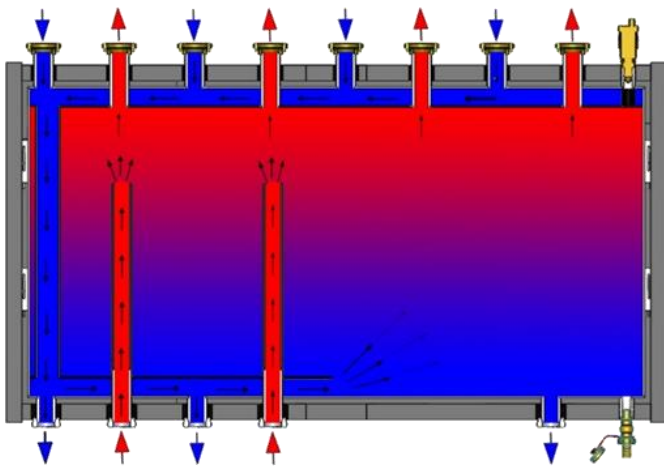

**Insulation EPP 28mm + 10 mm rubber**

Drain valve, SPIROTOP, Automatic air-vent, Safety valve 2.5 bar 1/2" not included

Art		Volume, L	Price, Euro
OTU- 40-3-D-I +	3	40	<b>507.00</b>
OTU- 60-2-D-I +	2	55	<b>539.00</b>
OTU- 60-3-D-I +	3	60	<b>598.00</b>
OTU- 100-2-D-I +	2	90	<b>657.00</b>
OTU- 100-3-D-I +	3	100	<b>719.00</b>
OTU- 100-4-D-I +	4	100	<b>822.00</b>