



XT4514K

TELEHANDLERS

Comply with ANSI/CSA



XT4514K

TELEHANDLERS

Specifications

ITEM	XT4514K
Measurements	
Overall length (without fork)	6255mm
Overall width	2350mm
Overall height	2540mm
Fork length	1200mm
Fork width	150mm
Fork height	50mm
Boom length	/
Wheelbase	3490mm
Ground clearance	400mm
Turning radius(inside/outside)	3922mm/4100mm
Productivity	
Max. lift capacity	4500kg
Max. lifting height	13.2m
Max. outreach	9.3m
Max. travel speed	32km/h
Max. height lifting capacity	3000kg
Max. amplitude lifting capacity	1200kg
Unladen lifting/owering speed	14s/11s
Unladen Extension/retraction speed	18s/15s
Gradeability(overload)	35%

Technical Data

Tilting angle of fork(tip up/tip down)	-14°/112°
Hydraulic system pressure	300bar
Hydraulic oil tank volume	160L
Fuel tank volume	140L
Hollow tire	14

Power source

Make/model	Cummins/QSF3.8
Rated power	97Kw/2200 rpm
Max torque	488N·m/1600 rpm

Transmission

Make/model	/
No. of gear	/



Weight

Total vehicle cube weight(with forks)	12000kg
---------------------------------------	---------

The available attachments include but not limited to the following

Hook	
Forks	
Winch	
Bucket	
Basket	
Log clamp	
Workplatform	
Cylinder clamp	

Range of motion GTH-XT4514K with stabilizers up

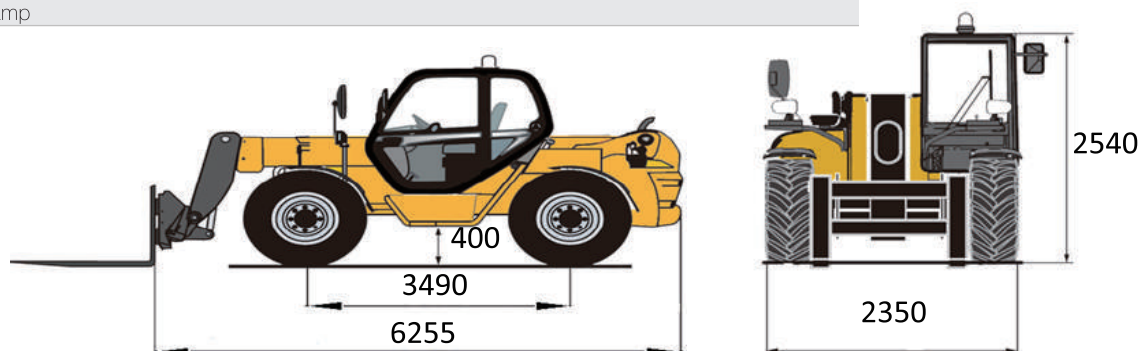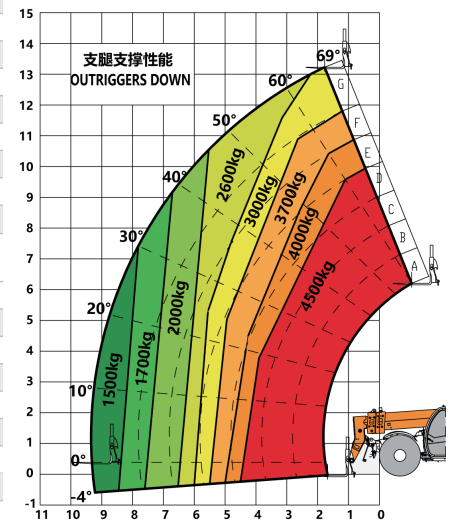

SOLID TO SUCCEED