

SAVE 3H



The luminaire is designed for emergency lighting during power outages.

For emergency lighting:

- production;
- administrative;
- office;
- commercial;
- agricultural;
- warehouses;
- sports;
- auxiliary;
- and other premises;
- fire hazardous areas of classes P-I, P-II.

Housing: Plastic.

Diffuser: Transparent polycarbonate (PC, UV-stabilized).




Light Source: Samsung LEDs (South Korea).

Power Supply: HELVAR (Finland).

Package Contents: Luminaire with integrated LED light source and installation kit.

Model	SAVE 3H MT	SAVE 3H AT
Operating Voltage (V)	220 V	
Operating Temperature (°C)	from +10 to +50	
Correlated Color Temperature (CCT, K)	5000	
Ingress Protection (IP)	IP 65	
Mechanical Stability	M1	
Rated Power (W)	5	7
Luminous Flux (lm)	190	190
Light Source	Samsung LEDs (South Korea)	
Power Supply	HELVAR (Finland)	
Fire Hazard Zone Class	P-I, P-II	
Battery Type	LiFEPO4 6,4V 1500mAh	
Operating time in automatic mode, hours.	3	
Battery charge time, hours.	24	
Testing options	Manual test	Automatic test
Installation	Wall/ceiling mounted	
Dimensions (LxWxH, mm)	269x144x42	

Lamp Sketch

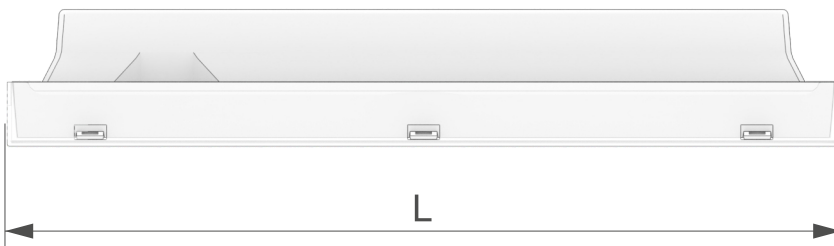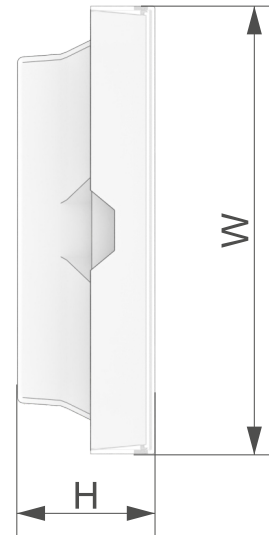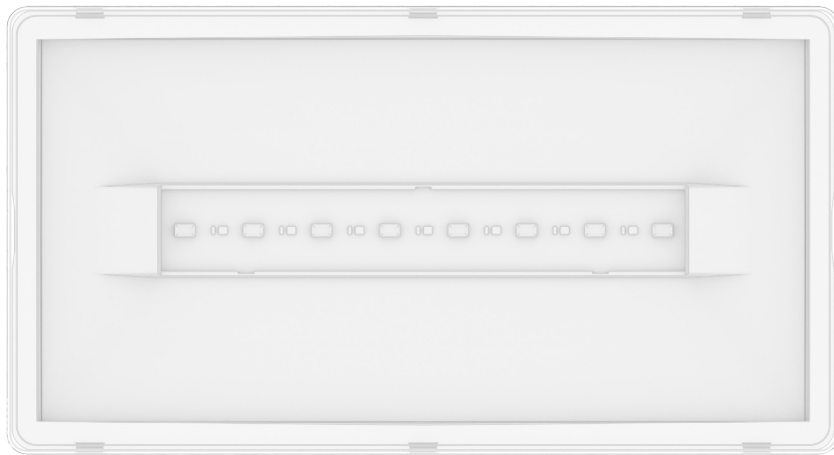

SAVE 3H