


LOFT Pole

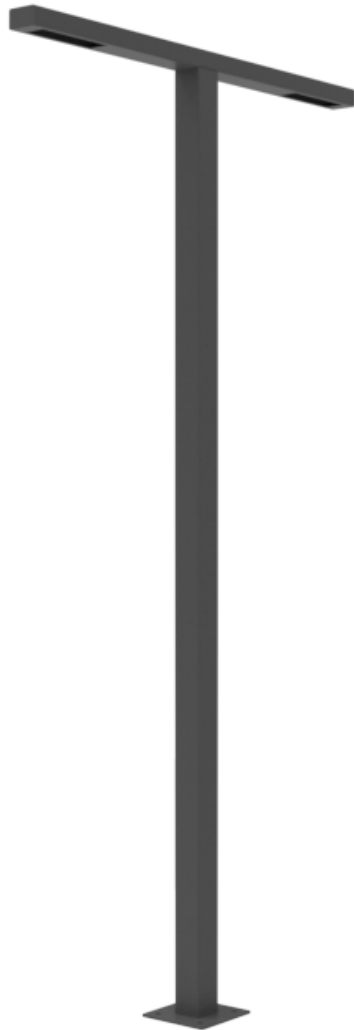

LOFT Single-Sided

LOFT Single-Sided

LOFT Z-type Pole

LOFT Z2-type Pole

Bracket Pole

Bracket Pole

The poles are used for lighting compact areas, residential courtyards, private estates, park zones, bridges, and various recreational spaces. This type of park pole is designed in a LOFT style, offering an aesthetically appealing appearance.

The poles are designed for mounting one or two integrated LED luminaires.


The LED luminaire is built into the pole (ordered separately).

The pole is installed on a concreted anchor assembly.

Corrosion Protection Options:

- Anti-corrosion primer and 3-in-1 anti-corrosion enamel
- Cold galvanization and 3-in-1 anti-corrosion enamel
- Hot-dip galvanization

Item	Height (H), m	Flange Size (WxW), mm	Number of Luminaires, pcs	Weight, kg	Embedded Anchor Type
Pole LOFT Г					
LOFT Г-1-2,5-40 (30)	2,5	250x250	1	35,2	ΦM1
LOFT Г-1-3,0-40 (30)	3,0	250x250	1	39,2	ΦM1
LOFT Г-1-3,5-40 (30)	3,5	250x250	1	45,3	ΦM1
LOFT Г-1-4,0-40 (30)	4,0	290x290	1	51,9	ΦM1
LOFT Г-1-4,5-40 (30)	4,5	290x290	1	56,0	ΦM1
LOFT Г-1-5,0-40 (30)	5,0	290x290	1	60,1	ΦM1
Pole LOFT Г2					
LOFT Г2-2,5-80 (60)	2,5	250x250	2	40,9	ΦM1
LOFT Г2-3,0-80 (60)	3,0	250x250	2	46,9	ΦM1
LOFT Г2-3,5-80 (60)	3,5	250x250	2	51,0	ΦM1
LOFT Г2-4,0-80 (60)	4,0	290x290	2	57,6	ΦM1
LOFT Г2-4,5-80 (60)	4,5	290x290	2	61,7	ΦM1
LOFT Г2-5,0-80 (60)	5,0	290x290	2	65,8	ΦM1
Pole LOFT Z					
LOFT Z-3,0-40 (30)	3,0	250x250	1	45,0	ΦM1
LOFT Z-3,5-40 (30)	3,5	250x250	1	49,1	ΦM1
LOFT Z-4,0-40 (30)	4,0	290x290	1	53,2	ΦM1
LOFT Z-4,5-40 (30)	4,5	290x290	1	58,1	ΦM1
LOFT Z-5,0-40 (30)	5,0	290x290	1	61,3	ΦM1
Pole LOFT Z2					
LOFT Z2-3,0-80 (60)	3,0	250x250	2	45,2	ΦM1
LOFT Z2-3,5-80(60)	3,5	250x250	2	49,3	ΦM1
LOFT Z2-4,0-80 (60)	4,0	290x290	2	53,4	ΦM1
LOFT Z2-4,5-80 (60)	4,5	290x290	2	58,3	ΦM1
LOFT Z2-5,0-80 (60)	5,0	290x290	2	61,5	ΦM1

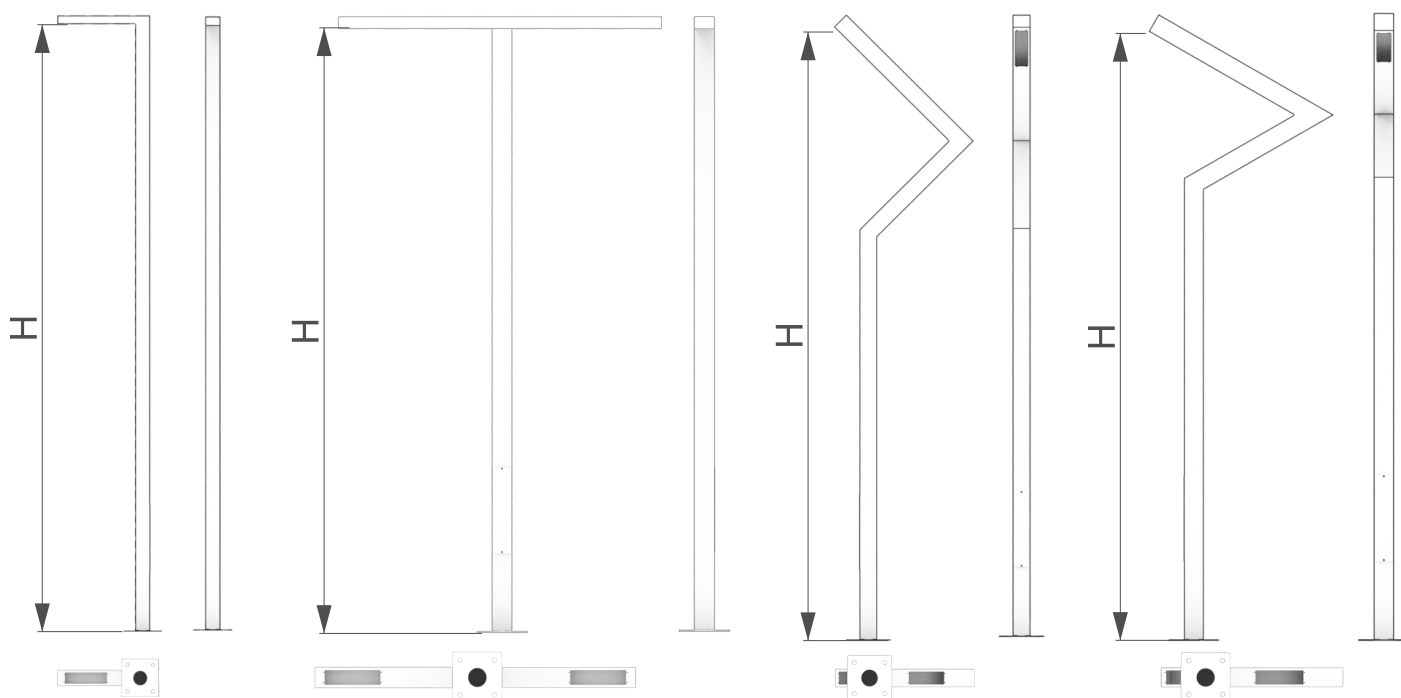

**LOFT Single-Sided
Bracket Pole**

**LOFT Single-Sided
Bracket Pole**

LOFT Z-type Pole

LOFT Z2-type Pole