


Flanged Park Pole OPF

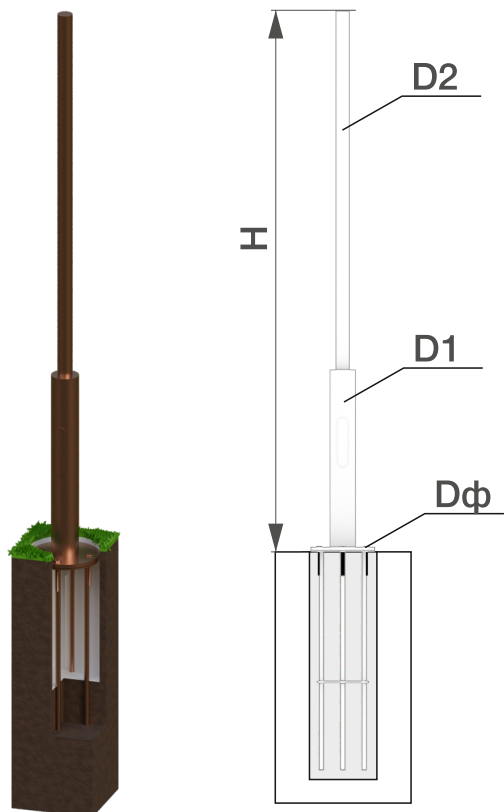

The poles are used for lighting compact areas, residential courtyards, private estates, park zones, bridges, and various recreational spaces.

A luminaire can be mounted directly onto the pole or attached via a bracket.

The pole is installed on a concreted anchor assembly of type FM01 or Fm02.

Corrosion Protection Options:

- Anti-corrosion primer and 3-in-1 anti-corrosion enamel
- Cold galvanization and 3-in-1 anti-corrosion enamel
- Hot-dip galvanization

Item	Height (H), m	Flange Size (Dx), mm	D1, mm	D2, mm	D3, mm	Weight, kg	Embedded Anchor Type
Flanged Park Pole OPF							
OPF(108/57)-2,0	2,0	220	108	57	-	16,5	FM01-6
OPF(108/57)-2,5	2,5	240	108	57	-	19,5	FM01-8
OPF(108/57)-3,0	3,0	240	108	57	-	21,6	FM01-8
OPF(108/57)-3,5	3,5	260	108	57	-	26,0	FM01-10
OPF(108/57)-4,0	4,0	260	108	57	-	29,1	FM01-10
OPF(108/76/57)-4,0	4,0	260	108	76	57	31,0	FM02-10
OPF(108/76/57)-4,5	4,5	260	108	76	57	35,0	FM02-10
OPF(108/76/57)-5,0	5,0	260	108	76	57	37,7	FM02-10
Flanged Park Pole OP1F							
OP1F(108/76)-2,5	2,5	260	108	76	-	25,9	FM02-8
OP1F(108/76)-3,0	3,0	260	108	76	-	28,6	FM02-8
OP1F(108/76)-3,5	3,5	260	108	76	-	32,0	FM02-10
OP1F(108/76)-4,0	4,0	260	108	76	-	34,7	FM02-10
OP1F(108/76)-4,5	4,5	260	108	76	-	37,2	FM02-11
OP1F(108/76)-5,0	5,0	260	108	76	-	39,9	FM02-11
Flanged Park Pole OP2F							
OP2F(127/76)-3,0	3,0	260	127	76	-	29,8	FM02-8
OP2F(127/76)-3,5	3,5	260	127	76	-	33,7	FM02-10
OP2F(127/76)-4,0	4,0	260	127	76	-	36,4	FM02-10
OP2F(127/76)-4,5	4,5	260	127	76	-	39,0	FM02-11
OP2F(127/76)-5,0	5,0	260	127	76	-	41,7	FM02-11

*D3 - Diameter of the Additional Pole Section