


# Cable Pole OK

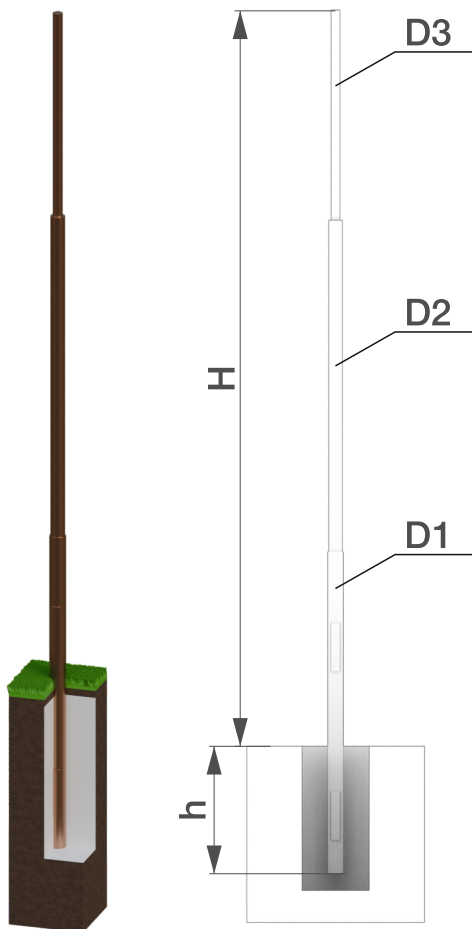

Cable poles are designed for urban street lighting of squares, courtyards, parks, gardens, parking areas, and streets.

These poles are intended for underground cable power supply.

Luminaires are mounted using top brackets. The pole is installed on a concreted anchor assembly of type FM1 or Fm2.

## Corrosion Protection Options:

- Anti-corrosion primer and 3-in-1 anti-corrosion enamel
- Cold galvanization and 3-in-1 anti-corrosion enamel
- Hot-dip galvanization

| Item             | Pole Height (H), m | Flange Size (WxW), mm | D1, mm | D2, mm | D3, mm | Weight, kg |
|------------------|--------------------|-----------------------|--------|--------|--------|------------|
| <b>Pole OK1</b>  |                    |                       |        |        |        |            |
| OK1(127/76)-5,0  | 5,0                | 1,5                   | 127    | 108    | 76     | 61,7       |
| OK1(127/76)-5,5  | 5,5                | 1,5                   | 127    | 108    | 76     | 65,6       |
| OK1(127/76)-6,0  | 6,0                | 1,5                   | 127    | 108    | 76     | 68,5       |
| OK1(127/76)-6,5  | 6,5                | 1,5                   | 127    | 108    | 76     | 71,4       |
| <b>Pole OK2</b>  |                    |                       |        |        |        |            |
| OK2(127/108)-5,0 | 5,0                | 1,5                   | 127    | 108    | -      | 62,9       |
| OK2(127/108)-5,5 | 5,5                | 1,5                   | 127    | 108    | -      | 66,8       |
| OK2(127/108)-6,0 | 6,0                | 1,5                   | 127    | 108    | -      | 70,7       |
| OK2(127/108)-6,5 | 6,5                | 1,5                   | 127    | 108    | -      | 75,2       |
| <b>Pole OK3</b>  |                    |                       |        |        |        |            |
| OK3(159/89)-7,0  | 7,0                | 1,5                   | 159    | 127    | 89     | 98,6       |
| OK3(159/89)-8,0  | 8,0                | 2,0                   | 159    | 127    | 89     | 110,8      |
| OK3(159/89)-9,0  | 9,0                | 2,0                   | 159    | 127    | 89     | 119,9      |
| <b>Pole OK4</b>  |                    |                       |        |        |        |            |
| OK4(159/108)-7,0 | 7,0                | 1,5                   | 159    | 127    | 108    | 102,9      |
| OK4(159/108)-8,0 | 8,0                | 2,0                   | 159    | 127    | 108    | 115,0      |
| OK4(159/108)-9,0 | 9,0                | 2,0                   | 159    | 127    | 108    | 124,2      |