

Kc(c) Bracket



The KC(C) bracket is used for mounting cantilever luminaires on reinforced concrete and metal poles using banding tape.

Pipe diameter for luminaire installation: 48 mm


The table provides available options with a 15° arm inclination angle to the horizontal

Custom brackets with a specific inclination angle can be manufactured upon request

The bracket can be ordered without a hook for SIP attachment

Corrosion Protection Options:

- Anti-corrosion primer and 3-in-1 anti-corrosion enamel
- Cold galvanization and 3-in-1 anti-corrosion enamel
- Hot-dip galvanization

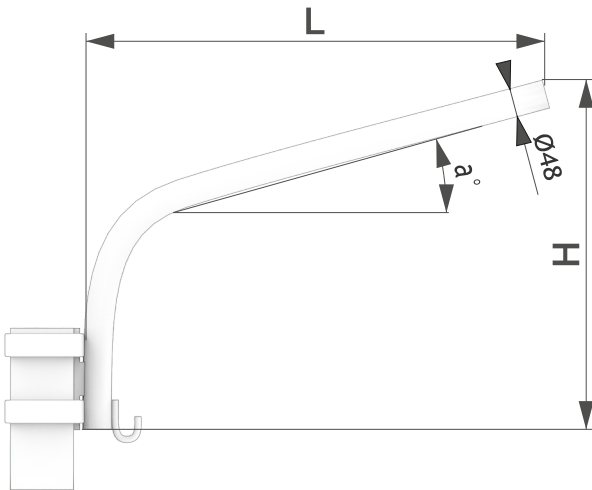

Item	Height (H), m	Length (L), m	Angle (α)	Weight, kg
KC(c) -1-0,5-0,5-15°	0,5	0,5	15°	3,6
KC(c) -1-0,7-0,8-15°	0,7	0,8	15°	5,1
KC(c) -1-0,75-1,0-15°	0,75	1,0	15°	5,7
KC(c) -1-1,0-1,0-15°	1,0	1,0	15°	6,7
KC(c) -1-1,0-1,2-15°	1,0	1,2	15°	7,2
KC(c) -1-1,0-1,5-15°	1,0	1,5	15°	7,9
KC(c) -1-1,2-1,5-15°	1,2	1,5	15°	8,5
KC(c) -1-1,5-1,5-15°	1,5	1,5	15°	9,7
KC(c) -1-1,5-2,0-15°	1,5	2,0	15°	11,0