


KBS-U Bracket and KBS-UR Bracket



KBS-U Bracket

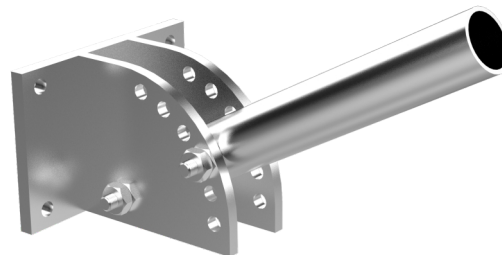

KBS-UR

The KBS-U bracket is designed for mounting a cantilever luminaire.

Key Features:

Universal mounting system:

Can be wall-mounted using anchors

Can be secured to reinforced concrete and metal poles using stainless steel banding tape

Available in 15°, 30°, and 45° arm inclination angles to the horizontal (as listed in the table)

Custom brackets with a specific inclination angle can be manufactured upon request

Can also be produced with a hook for SIP attachment.

The KBS-UR bracket is designed for mounting a cantilever luminaire and features universal mounting with adjustable inclination.

Key Features:

Universal mounting system:

Can be wall-mounted using anchors

Can be secured to reinforced concrete vibrated poles using stainless steel banding tape.


Adjustable arm inclination angle from 0° to 75°, with 15° increments

Corrosion Protection Options:


- Anti-corrosion primer and 3-in-1 anti-corrosion enamel
- Cold galvanization and 3-in-1 anti-corrosion enamel
- Hot-dip galvanization

Item	Angle (α)	Length (L), m	Weight, kg
KBS-U(15°)-0,35	15°	0,35	1,4
KBS-U(15°)-0,4	15°	0,4	1,6
KBS-U(15°)-0,5	15°	0,5	1,9
KBS-U(15°)-0,6	15°	0,6	2,2
KBS-U(15°)-0,75	15°	0,75	2,7
KBS-U(30°)-0,35	30°	0,35	1,4
KBS-U(30°)-0,4	30°	0,4	1,6
KBS-U(30°)-0,5	30°	0,5	1,9
KBS-U(30°)-0,6	30°	0,6	2,2
KBS-U(30°)-0,75	30°	0,75	2,7
KBS-U(45°)-0,35	45°	0,35	1,4
KBS-U(45°)-0,4	45°	0,4	1,6
KBS-U(45°)-0,5	45°	0,5	1,9
KBS-U(45°)-0,6	45°	0,6	2,2
KBS-U(45°)-0,75	45°	0,75	2,7
KBS-UR-0,3	Змінний	0,3	2,5
KBS-UR-0,35	Змінний	0,35	2,7
KBS-UR-0,4	Змінний	0,4	2,9
KBS-UR-0,5	Змінний	0,5	3,2
KBS-UR-0,6	Змінний	0,6	3,5
KBS-UR-0,75	Змінний	0,75	4,0

KBS-U Bracket and KBS-UR Bracket

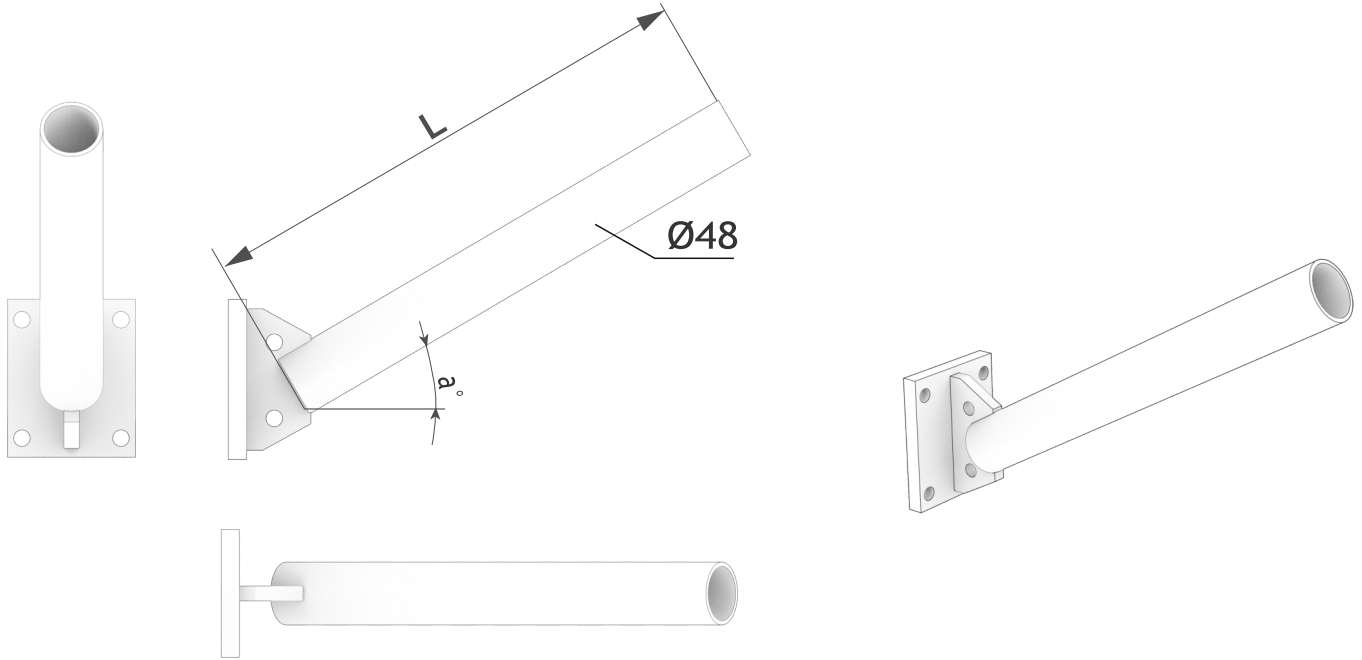

KBS-U Bracket

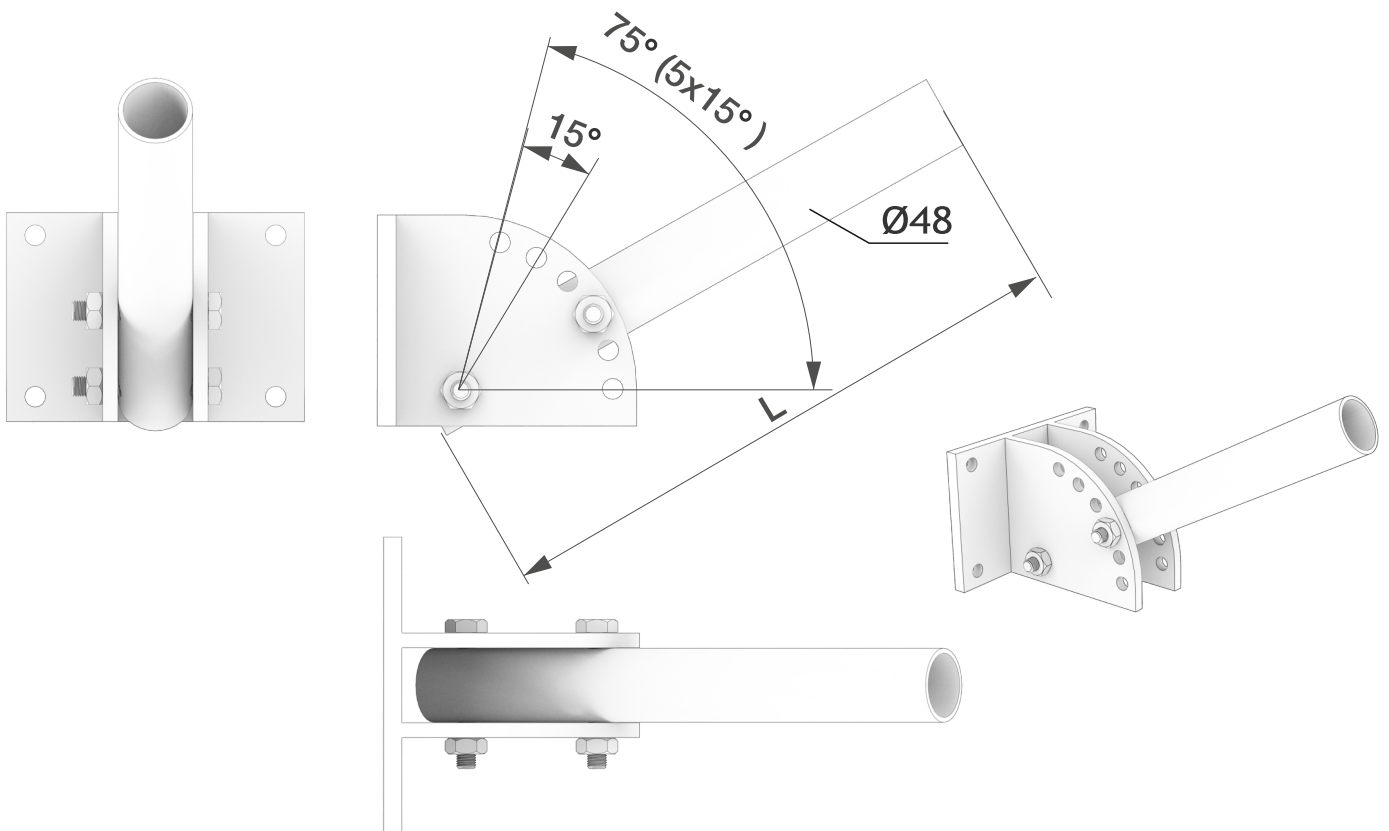

KBS-UR Bracket