



KO5 Top Bracket




KO5 - 1

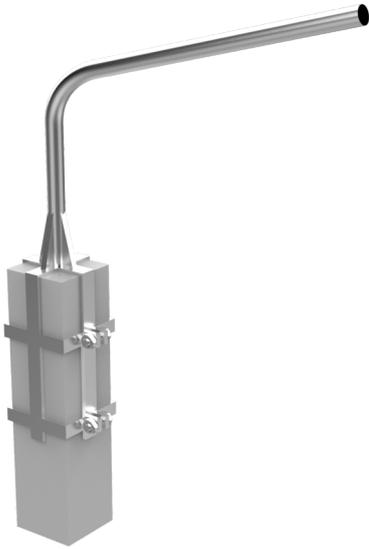

KO5 - 2

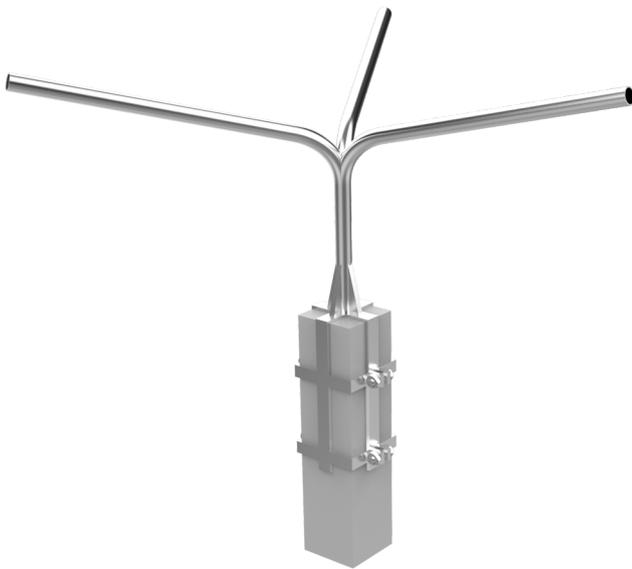

KO5 - 3

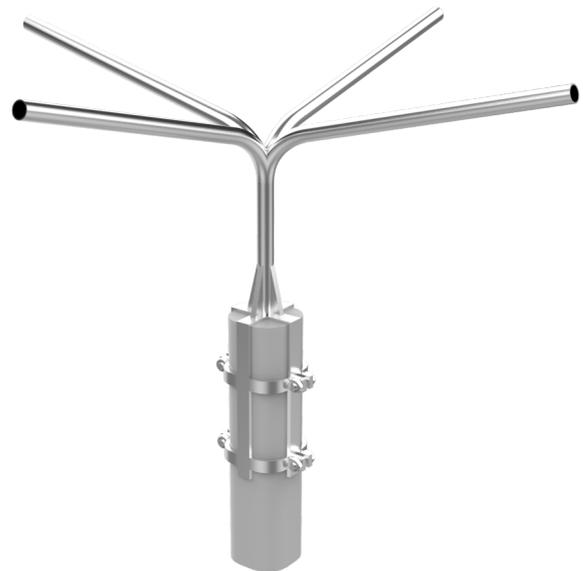

KO5 - 4

The KO5 radius-type pole-top bracket is designed for mounting cantilever luminaires on reinforced concrete poles.

Key Features:

• Pipe diameter for luminaire installation: 48 mm

• Available with a 15° arm inclination angle to the horizontal (as listed in the table)

• Custom brackets with a specific inclination angle can be manufactured upon request

When ordering, please specify the type of pole the bracket will be installed on (e.g., SV95, Sv105, SK105, SK120).

Corrosion Protection Options:

- Anti-corrosion primer and 3-in-1 anti-corrosion enamel
- Cold galvanization and 3-in-1 anti-corrosion enamel
- Hot-dip galvanization

Bracket KO5(*)-1-H-L-15°

Bracket KO5(*)-2(β)-H-L-15°

Item	Height (H), m	Overhang (L), m	Angle (α)	Weight, kg	Item	Height (H), m	Overhang (L), m	Angle (α)	Weight, kg
KO5(*)-1-0,7-0,8-15°	0,7	0,8	15°	14,8	KO5(*)-2(β)-0,7-0,8-15°	0,7	0,8	15°	19,1
KO5(*)-1-1,0-1,0-15°	1,0	1,0	15°	16,3	KO5(*)-2(β)-1,0-1,0-15°	1,0	1,0	15°	22,1
KO5(*)-1-1,0-1,2-15°	1,0	1,2	15°	16,8	KO5(*)-2(β)-1,0-1,2-15°	1,0	1,2	15°	23,1
KO5(*)-1-1,0-1,5-15°	1,0	1,5	15°	17,5	KO5(*)-2(β)-1,0-1,5-15°	1,0	1,5	15°	24,5
KO5(*)-1-1,2-1,5-15°	1,2	1,5	15°	18,1	KO5(*)-2(β)-1,2-1,5-15°	1,2	1,5	15°	25,8
KO5(*)-1-1,5-1,5-15°	1,5	1,5	15°	19,3	KO5(*)-2(β)-1,5-1,5-15°	1,5	1,5	15°	28,0
KO5(*)-1-1,5-2,0-15°	1,5	2,0	15°	20,7	KO5(*)-2(β)-1,5-2,0-15°	1,5	2,0	15°	30,7

The distance β between the consoles can be -60°; 90°; 120°; 180°.

Bracket KO5(*)-3(β)-H-L-15°

Bracket KO5(*)-4(90°)-H-L-15°

Item	Height (H), m	Overhang (L), m	Angle (α)	Weight, kg	Item	Height (H), m	Overhang (L), m	Angle (α)	Weight, kg
KO5(*)-3(β)-0,7-0,8-15°	0,7	0,8	15°	23,5	KO5(*)-4(90°)-0,7-0,8-15°	0,7	0,8	15°	27,8
KO5(*)-3(β)-1,0-1,0-15°	1,0	1,0	15°	28,0	KO5(*)-4(90°)-1,0-1,0-15°	1,0	1,0	15°	33,8
KO5(*)-3(β)-1,0-1,2-15°	1,0	1,2	15°	29,5	KO5(*)-4(90°)-1,0-1,2-15°	1,0	1,2	15°	35,8
KO5(*)-3(β)-1,0-1,5-15°	1,0	1,5	15°	31,5	KO5(*)-4(90°)-1,0-1,5-15°	1,0	1,5	15°	38,5
KO5(*)-3(β)-1,2-1,5-15°	1,2	1,5	15°	33,5	KO5(*)-4(90°)-1,2-1,5-15°	1,2	1,5	15°	41,1
KO5(*)-3(β)-1,5-1,5-15°	1,5	1,5	15°	36,7	KO5(*)-4(90°)-1,5-1,5-15°	1,5	1,5	15°	45,3
KO5(*)-3(β)-1,5-2,0-15°	1,5	2,0	15°	40,7	KO5(*)-4(90°)-1,5-2,0-15°	1,5	2,0	15°	50,6

The distance β between the consoles can be -90°; 120°.

