


TS Pipe Supports

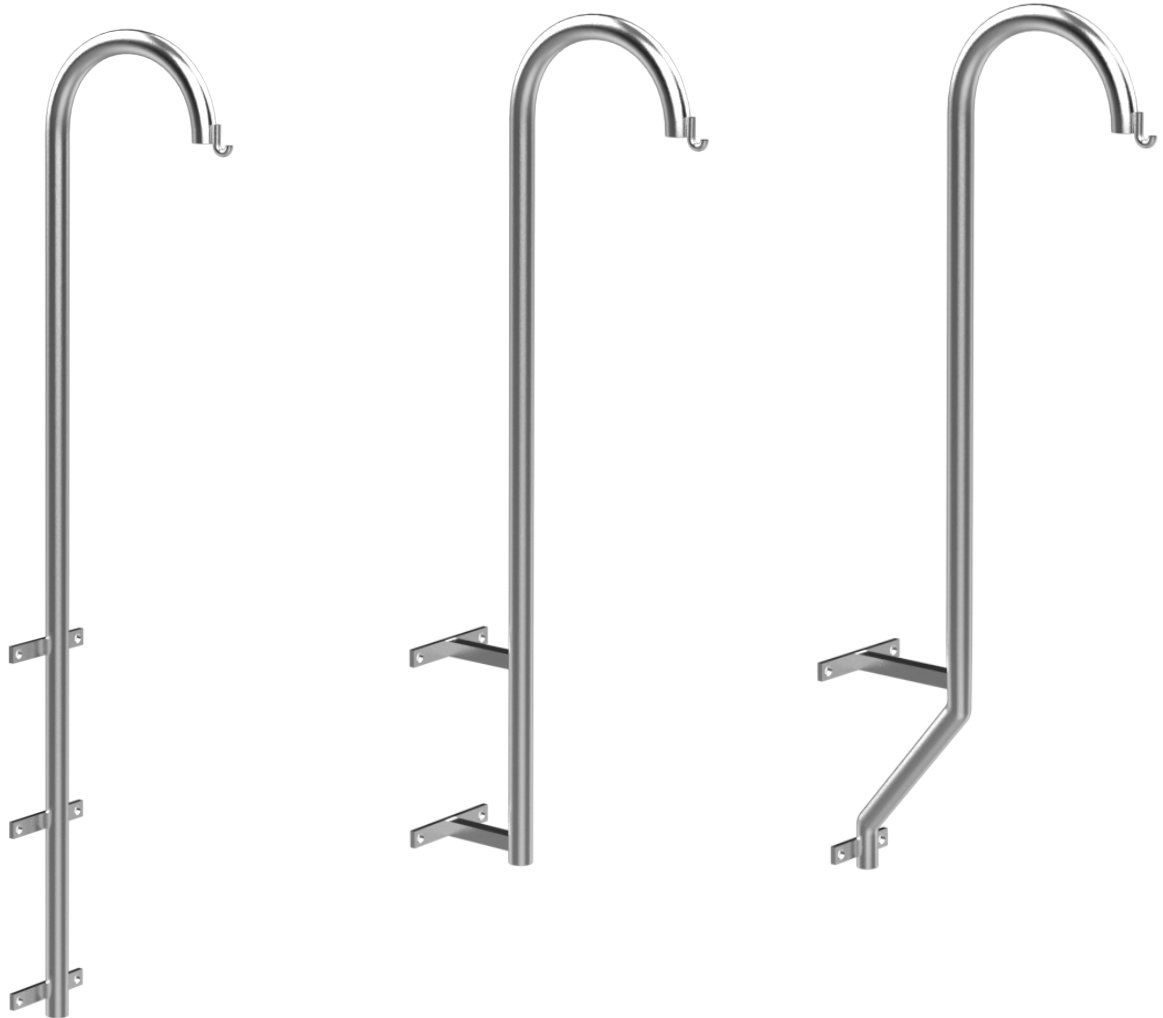

TS1

TS2

TS3

TS pipe supports are used for securing SIP (self-supporting insulated conductors) on building facades and for feeding power lines into distribution panels. Additionally, these supports can be used for mounting suspended lighting fixtures.

Corrosion Protection Options:

- Anti-corrosion primer and 3-in-1 anti-corrosion enamel
- Cold galvanization and 3-in-1 anti-corrosion enamel
- Hot-dip galvanization

Ts1 Pipe Supports


Item	Height (H), m	Overhang (L), m	Pipe Diameter (Dtr), mm	Weight, kg
TS1-48-2,0	2,0	57	48	11,5
TS1-48-2,5	2,5	57	48	13,8
TS1-48-3,0	3,0	57	48	15,5
TS1-42-1,5	1,5	76	42	8,4
TS1-42-2,0	2,0	76	42	9,8
TS1-42-2,5	2,5	76	42	11,7
TS1-42-3,0	3,0	76	42	13,1

Ts2 Pipe Supports

Item	Height (H), m	Overhang (L), m	Pipe Diameter (Dtr), mm	Weight, kg
TS2-48-0,25-1,5	1,5	0,25	48	9,9
TS2-48-0,25-2,0	2,0	0,25	48	12,1
TS2-48-0,25-2,5	2,5	0,25	48	13,8
TS2-42-0,25-1,5	1,5	0,25	42	8,4
TS2-42-0,25-2,0	2,0	0,25	42	9,8
TS2-42-0,25-2,5	2,5	0,25	42	11,7

Ts3 Pipe Supports

Item	Height (H), m	Overhang (L), m	Pipe Diameter (Dtr), mm	Weight, kg
TS3-48-0,3-1,5	1,5	0,3	48	11,5
TS3-48-0,3-2,0	2,0	0,3	48	13,1
TS3-48-0,3-2,5	2,5	0,3	48	14,8
TS3-42-0,3-1,5	1,5	0,3	42	9,5
TS3-42-0,3-2,0	2,0	0,3	42	10,9
TS3-42-0,3-2,5	2,5	0,3	42	12,3

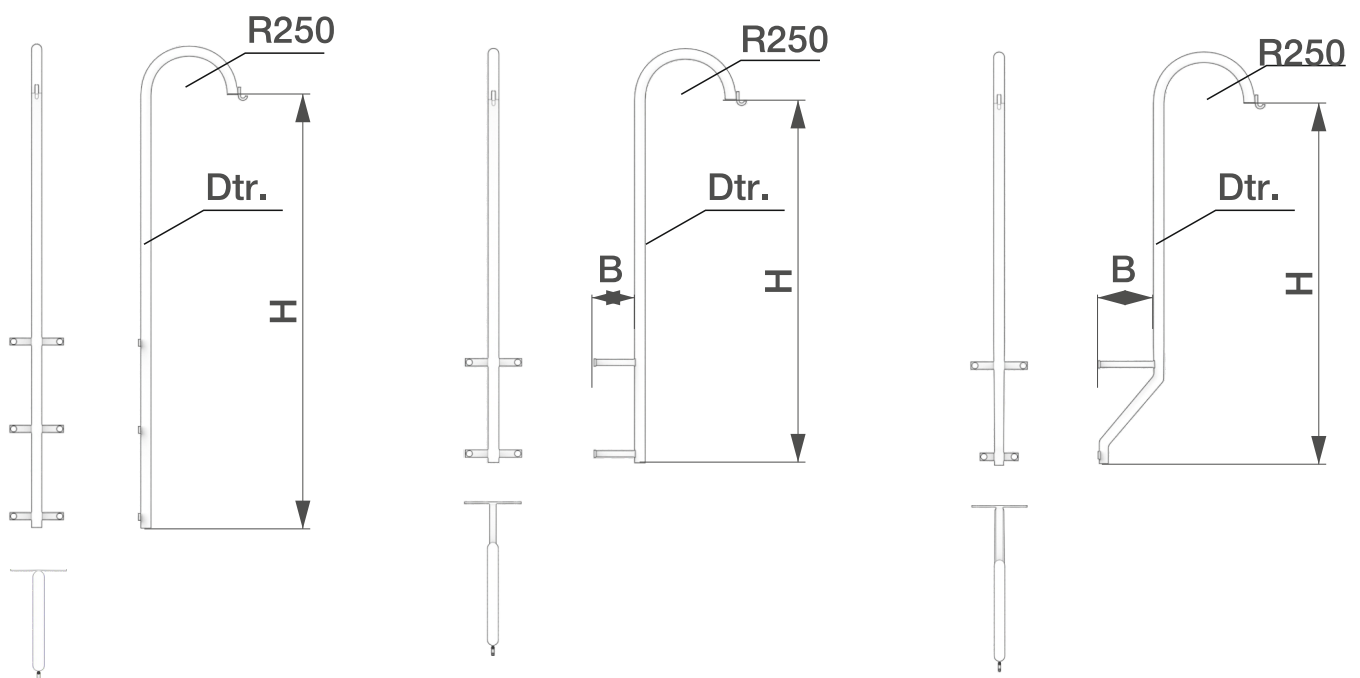

TS1

TS2

TS3